



Gfp Graphic Finishing
partners

Where Finishing Comes First.

Gfp 563TH-3MaxPro

Maximum Productivity Top Heat Laminator

What's the best way to make your production even better? Shorten film loading time? Make fewer film changes? Increase throughput speed? The 563TH-3 does all that and more.

MAXIMUM PRODUCTIVITY

50% faster throughput

FAST ROLL CHANGES

Front/Rear Swing-out shafts

EASY LOADING

3" Aluminum Quick-Grip shifts

RUGGED DESIGN

Metal Alloy heaters

VERSATILE

Roll-to-Roll capability



overlamination • mounting • board pre-coating

Spend less time on set-ups and changeovers with swing-out supply shafts.

50% faster throughput and quick application changes save time, effort and money.




- Swing-out Quick-Grip supply shafts
- Drop-in Quick-Grip rewind shafts
- Photoelectric eye for safety
- Optional motorized rear rewind
- Swing-up feed table & 38" output height
- Metal Alloy heater reduces breakage
- 4.5" diameter rollers
- Roller gap measurement scale
- Feed tray safety lock

MyBinding.com
5500 NE Moore Court
Hillsboro, OR 97124
Toll Free: 1-800-944-4573
Local: 503-640-5920



Motorized rear rewind for roll-to-roll applications

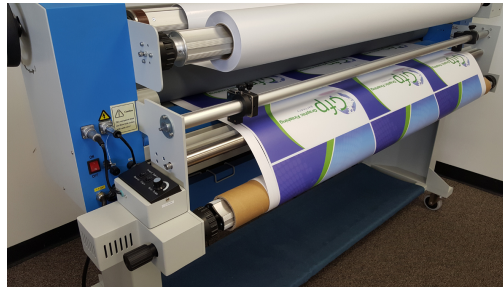

Optional Rear Rewind/Slitter



Media Alignment disks keep supply rolls from telescoping

Rugged Design
Professional Quality
Proven Performance
Economically Priced

APPLICATIONS

Signs
Banners
POP Displays
Trade show displays
Graphic mounting
Photo mounting
Dry-erase boards
Floor graphics
Window graphics
Vehicle graphics

Warranty:

1 year parts & labor.
Installation is available.

cTUVus
 Safety
 Approval



Your local dealer is:

MyBinding.com
 5500 NE Moore Court
 Hillsboro, OR 97124
 Toll Free: 1-800-944-4573
 Local: 503-640-5920

563TH-3

<i>Laminating Width</i>	63"
<i>Roller Diameter</i>	4.5"
<i>Roller Gap</i>	1"
<i>Rear rewind</i>	Optional
<i>Maximum temperature</i>	122°F
<i>Laminating speed</i>	0-20 ft/min
<i>Pressure adjustment</i>	Hand Wheel
<i>Heat method</i>	Metal Alloy heater
<i>Max. roll diameter</i>	8" OD (top); 16" OD (bottom)
<i>Supply Shafts</i>	2 Swing-out
<i>Tension Adjustment</i>	Single knob
<i>Power Supply</i>	110v 12A
<i>Power Consumption</i>	1320W
<i>Foot Pedal</i>	Included
<i>Stand with casters</i>	Included
<i>Net Weight w/ stand</i>	502 lbs.
<i>Dimensions</i>	82" x 28.5" x 50"
<i>Machine Shipping</i>	530bs.; 89.4" x 33.1" x 29.2"
<i>Stand Shipping</i>	143 lbs.; 75" x 33" x 5.8"



Gfp **Graphic Finishing**
 partners

