

***GFP 865DH-3R 65''
Dual Heat Wide Format
Roll Laminator***

Product Spec Sheet



Provided by

MyBinding.com
When Image Matters.

Call Us at 1-800-944-4573



Gfp

Graphic Finishing
partners

Where Finishing Comes First.

Gfp 865DH-3

Professional Dual Heat Laminator

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 865DH-3 delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

ULTIMATE FLEXIBILITY

Dual heat for thermal & cold apps

PROFESSIONAL FEATURES

Produce Professional results

FAST ROLL CHANGES

Front/Rear Swing-out shafts

EASY LOADING

3" Quick-Grip Swing-out Shafts

INDUSTRIAL DESIGN

Years of maintenance-free service



laminating • mounting • encapsulating


Our most flexible, cost-effective laminator yet

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.




- Labor saving swing-out 3" Quick-Grip supply shafts
- Drop-in Quick-Grip rewind shafts
- Photoelectric eye for operator safety
- Independent top and bottom heaters
- Web clutch adjustment for output quality
- Optional motorized rear rewind
- Swing up feed table and 38" output height

MyBinding.com
5500 NE Moore Court
Hillsboro, OR 97124
Toll Free: 1-800-944-4573
Local: 503-640-5920

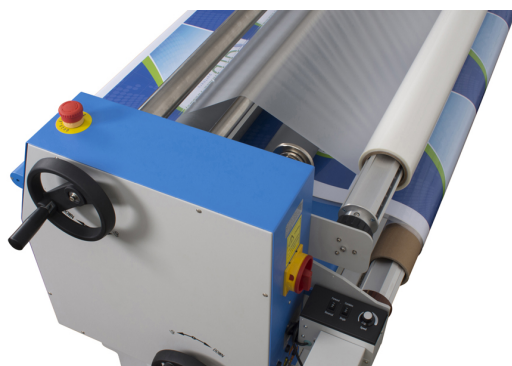

Motorized rear rewind for
roll-to-roll applications

Media Alignment Disks
prevent media supply
roll from telescoping
during operation.

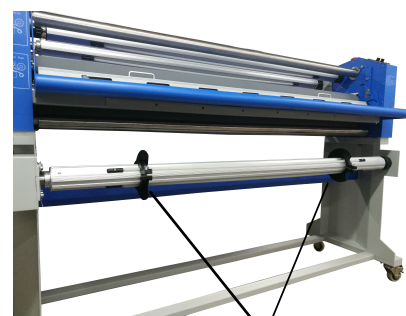

disks

Rugged Design
Professional Quality
Proven Performance
Economically Priced

APPLICATIONS

Signs
Posters
POP Displays
Trade show displays
Dry-erase boards
Graphic mounting
Photo mounting
Floor graphics
Window graphics
Vehicle graphics

cTUVus
Safety
Approval



Warranty:

1 year parts & labor.
Installation is included.

865DH-3

<i>Laminating Width</i>	65"
<i>Roller Diameter</i>	5"
<i>Roller Gap</i>	1"
<i>Main rollers</i>	Silicone
<i>Supply roll diameter(max)</i>	16" bottom, 8" top
<i>Film shafts</i>	3" aluminum Quick-Grip
<i>Rear rewind</i>	Optional
<i>Max. temperature</i>	266°F
<i>Heat method</i>	Quartz heater
<i>Film thickness</i>	1.5 - 10mil
<i>Laminating speed</i>	0-13 ft/min
<i>Drive motor</i>	DC geared motor
<i>Pressure Adjustment</i>	Dual hand wheels
<i>Roller heating</i>	Top & Bottom
<i>Power Supply</i>	240v 60HZ Single phase 24A
<i>Power Consumption</i>	Max. 5760W
<i>Net Weight w/ stand</i>	767 lbs.
<i>Dimensions</i>	87" x 34" x 49"
<i>Machine shipping</i>	893 lbs. 90 x 38" x 33"
<i>Stand shipping</i>	134 lbs. 79 x 33" x 15"

Your local dealer is:

MyBinding.com
5500 NE Moore Court
Hillsboro, OR 97124
Toll Free: 1-800-944-4573
Local: 503-640-5920



Gfp **Graphic Finishing**
partners

Nationwide service support through local dealers.

Gfp provides product and application
knowledge, machine service, installation,
and training.