


Adjustable Height Metal Cart Instructions


AVJ42, W42A

Parts List





A x1

Non-slip mat




B x1



C x4

Cabinet comes pre-assembled on units that include a cabinet.




D x4



E x4


Tools Required

- Phillips Screwdriver
- Rubber Mallet
- Pliers or Adjustable Wrench

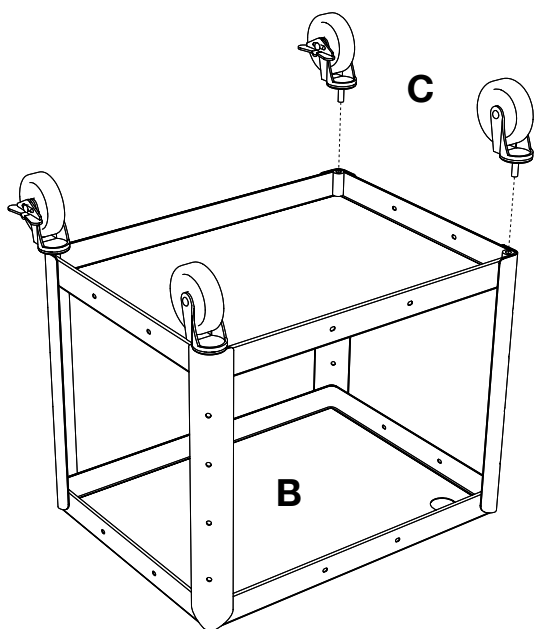


1

Position the bottom shelf **B** so that the castor holes are facing up. Insert castor **C** into the castor holes on the bottom of shelf **B**. Use a mallet to set the casters properly.

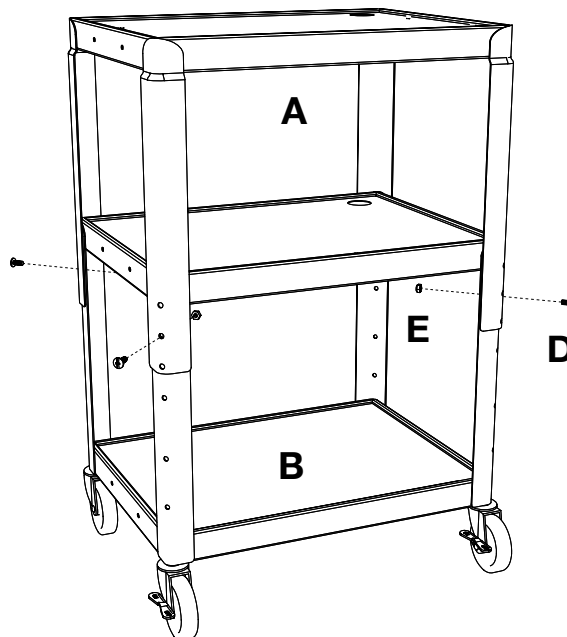

2

Flip bottom shelf **B** so that it is on its side. Set top shelf **A** so that it overlaps bottom shelf **B**. Align the screw holes so that the top shelf **A** is at the desired height.

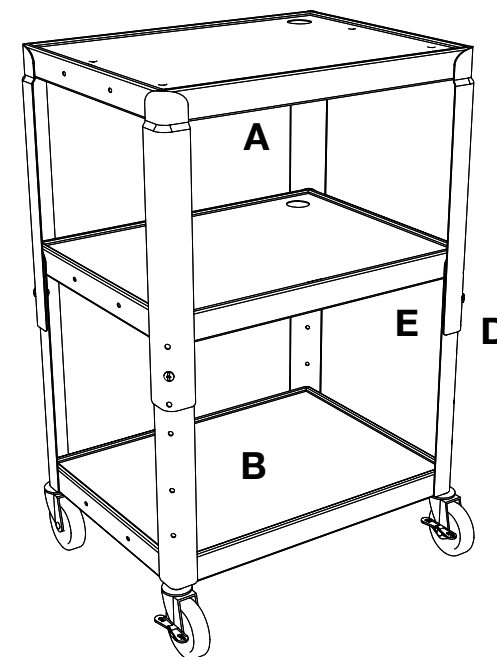

3

Insert screw **D** through the aligned screw hole of **A** and **B** and fasten nut **E** with pliers and screwdriver. Place Non-slip mat on desired shelf. The cart is now complete.