

Foster KeenCut SteelTrak Substrate Cutter

Balancing Weight Cord Replacement



Provided By


MyBinding.com
When Image Matters.

Replacing the SteelTraK Balance Weight Cord.

THE MACHINE MUST BE LAID FLAT ON ITS BACK TO CARRY OUT THIS WORK.


①

Undo the four Allen screws by three turns only (do not loosen the centre screw). This will loosen the cutting head on its track and allow you remove it.
BE CAREFUL IT IS HEAVY.

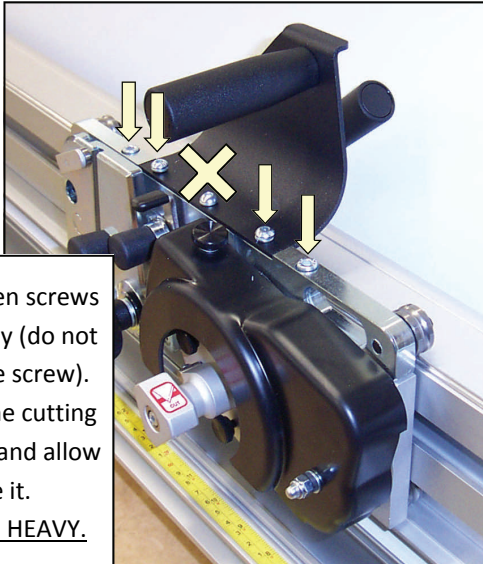


Lift and push the cutting head to the left and it will come free of the track.

②

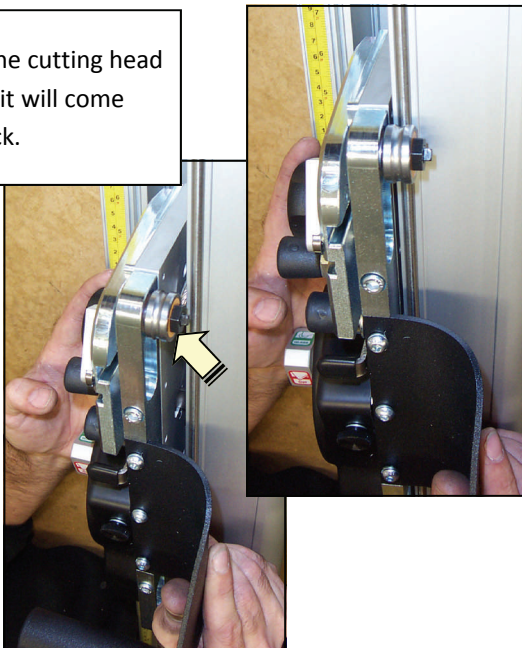

Remove the Cord anchor screw with its washer and spacer tube. Fit the new Cord and refit the cutting head to the machine.

③


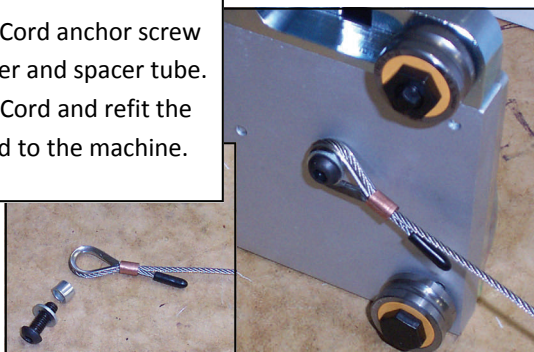


KEENCUT SteelTraK

Remove the Allen screw holding the Pulley Block in position.


Remove the Pulley Block and remove the Allen screws to release the two Pulleys and the Cord. Also remove the Cable Guide, if fitted. (mid-2009 onwards)

④

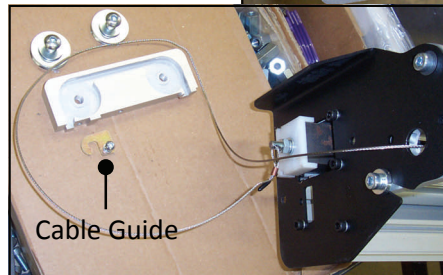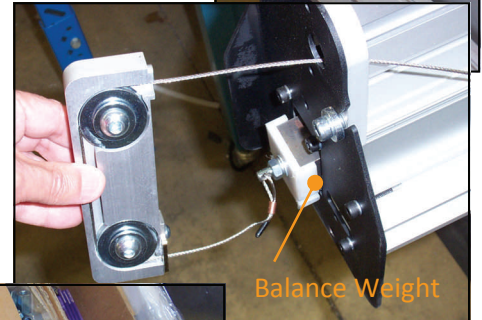

Loosen the locking nut on top of the Balance Weight, unscrew the cable fixing by and replace with the new Cord. Be sure to tread the new Cord through the hole in the Top Plate first.

⑤

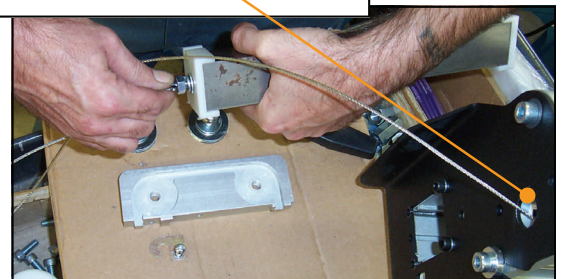

⑥

Replace the Balance Weight check the Cord is not twisted. Refix the Pulley's and Cable Guide then refix the Pulley Block. Ensure all screws are secured tightly and the Balance Weight and its Pulleys are lubricated with Petroloeum Jelly, Silicone or Lithium Grease

DO NOT USE OIL.

Place the cutting Head at the bottom of the machine before lifting it vertical (Min. two man lift) and securing it back in its operating position.

MyBinding.com