

ViziPrint® Impress White SEL Solvent/Latex *Print Media*

ViziPrint® Impress White SEL is specifically designed for trouble-free, dry installation of graphics on glass surfaces. Its proprietary suction technology leaves no residue behind, eliminates bubbling and is unaffected by moisture.

General Information

- 5 mil (125 micron) ultra white PET film
- Resistant to wear & tear (e.g., scratches) and water
- High dimensional stability with flat characteristics
- Ideal for self-adhesive applications on glass and other smooth, flat surfaces

Recommended Printer Platforms

- Compatible with solvent, eco solvent, latex, and UV curable inks
- For use with most printers

Specifications


Thickness	5 mil (125 µ)
Weight	210 g/m2
Base Film	White PET film
Adhesive	Proprietary adhesion technology
Width	54" (1371 mm)
Length	98' (30 m)
Core	3" (76 mm)

Applications

- For indoor and short-term outdoor* applications
- Window advertising, graphics, decals, and stickers
- Privacy and decorative glass applications
- Refrigerators or glass display cases
- Backlit displays

Key Features & Benefits

- Excellent print quality
- Very easy to apply and remove; can be re-positioned and re-applied multiple times
- No adhesive, so no residue left on surface
- Long-term removability
- Fast drying with normal ink load
- Does not stretch
- PVC-free and 100% recyclable

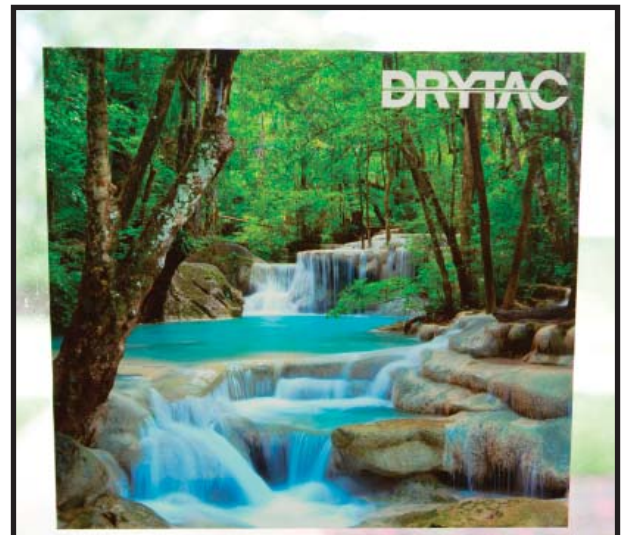

ViziPrint® Impress White SEL Solvent/Latex *Print Media*

Recommendations

- Designed for indoor use (*with limited outdoor applications)
- Use on smooth, flat surfaces only
- Clean the mounting substrate prior to application
- For larger installations, apply water with a spray bottle and use felt burnishing pad to assist with overall application
- Handle material with care prior to printing; use gloves to avoid fingerprints
- Printing temperature should be 59-86°F (15-30°C) with 30-60% humidity
- Set printer to highest print setting for optimal print quality
- If mounting on glass or other backlit substrates, evaluate color density of the print on a window or in transmitted light
- With high ink load, roll-to-roll printing is not recommended
- Remove air bubbles with a felt burnishing pad
- Store in closed original packaging in a cool, dry environment (50-77°F (10-25°C) with 50% relative humidity)
- Shelf life of one year if stored in original packaging in recommended conditions

IMPORTANT NOTE:

Information is intended only as a guide and is given without guarantees. Purchasers should independently determine, prior to use, the suitability of each material for their specific purpose. Follow the indications on the package, ask for the safety data sheets and always follow the indications contained therein.

Only the correct use of the product will allow satisfactory results. For this reason, Drytac is not responsible for improper use of the product, either by application or substrate applied to. Make certain that product is right for the desired use, and work according to the instructions given in our technical data sheets. If in doubt of the appropriate application methods or use, contact Drytac at one of the phone numbers listed below.