Formax Punch200 Heavy-Duty Electric Interchangeable Die Binding Punch

Product Spec Sheet



Provided by

MyBinding.com®

When Image Matters.

Call Us at 1-800-944-4573

Punch200

HEAVY-DUTY ELECTRIC PUNCH



PROFESSIONAL HEAVY-DUTY PUNCHING SYSTEM




- Heavy-duty versatile punch
- Interchangeable punching dies
- Automatic paper sensor for efficiency
- Sensor or foot pedal activation
- Horizontal paper feeding

FORMAX®

The **Punch 200 Electric Punch** provides heavy-duty punching for production environments. It accommodates a wide of variety of **interchangeable dies** for ReadyWire, plastic comb, and spiral coil, which can be changed in just minutes. **Disengageable punch pins** allow for flexibility when working with various paper sizes. Simply choose between **foot pedal or micro switch activation**, and punch sheet stacks up to 4mm thick. The **plexiglas cover** helps to ensure operator safety. It has the capacity to handle dies which have been resharpened, utilizing its **eccentric shaft adjustment**. Pair the **Punch200** with the **Wire200** or **Wire300** for efficient, production level punching and binding projects.



Mode Select Switch
Choose between foot pedal and micro switch activation modes.

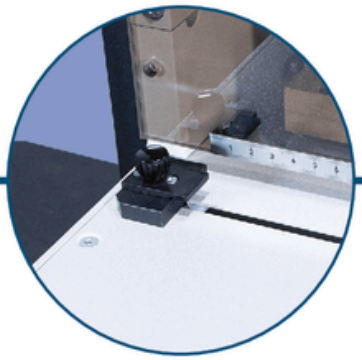

Micro Switch Sensor
Automatically triggers the punch mechanism when paper is inserted.



Eccentric Shaft Flexibility
Adjustable to accommodate resharpened dies.



Foot Pedal Operation
Heavy-duty industrial foot pedal for quick, easy operation.



Split Two-Part Die
Allows for a variety of punching jobs without purchasing a second die.

STANDARD FEATURES

- Heavy-duty all-metal construction
- Dies available for wire, comb, and coil
- Quick, easy size adjustment
- Fast die changes, under 3 minutes
- Eccentric punching shafts
- Automatic punch sensor
- Punches a variety of mixed paper stock
- Horizontal paper feeding
- Foot pedal or sensor activation
- Plexiglas safety cover

DIES FOR WIRE BINDING

- Punch200-10: 3:1, 4x4mm standard
- Punch200-11: 3:1, 4.5mm round
- Punch200-12: 2:1, 5.5x3.5mm rectangle
- Punch200-13: 2:1, 6x6mm standard
- Punch200-14: 2:1, 6.5mm round

DIES FOR SPIRAL BINDING

- Punch200-15: .25" pitch, 5x4mm oval

DIES FOR COMB BINDING

- Punch200-16: 8x3mm standard

SPECIFICATIONS

Mechanical Cycles	Up to 3,000/hr
Min. Punching Width	2.4" (60mm) with foot pedal 4.1" (105mm) with micro switch
Max. Punching Width	Up to 19.7" (500mm)
Min. Unpunched Length	2.75" (70mm) with foot pedal 4.3" (110mm) with micro switch
Max. Unpunched Length	Up to 31.5" (800mm)
Max. Punching Thickness	Up to .15" (4mm)
Punching Operation	Micro switch sensor or foot pedal
Punch Dies Available	3:1, 2:1 ReadyWire, plastic comb, spiral coil
Disengageable Punch Pins	Yes
Variable Margin Depth	No
Dimensions	26.4" L x 17.7" D x 15.7" H (670 x 450 x 400mm)
Weight	247 lbs. (112kg)
Power Supply	208V, 3 Phase, 20A, 50/60Hz